


TECHNICAL DATA

Max. pressure :	350	bar
Max. flow :	20	l/min
Cavity – Tooling (page 10.010) : CA-08A-2N		
External seals kit : see page 11.011		
Installation torque :	40-45	Nm
Weight :	0.140	kg

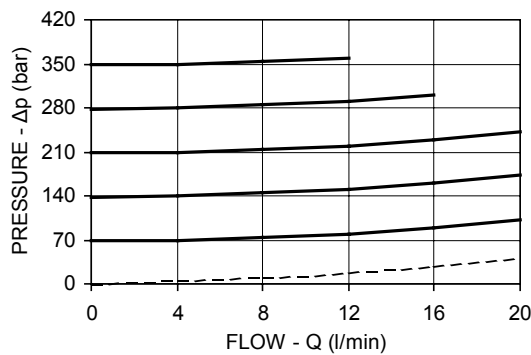

X ADJUSTMENTS

03	Leakproof hex. socket screw	
04	Handknob and locknut	

Z

SPRINGS

		Adj. press. range bar	Press. increase bar/turn	Standard setting bar (Q=5 l/min)		
X = 03	05	10-70	26	50		
	10	35-140	50	100		
	20	105-210	79	200		
	35	175-350	170	350		
X = 04	35	35-350	72	200		

OPTIONALS

Ordering code	Description
11.04.23.002	