МАГАЗИН ГИДРАВЛИКИ
RM316.RU
Санкт-Петербург,
ул. Коммуны, 67, лит. БМ
+7 (812) 448-65-13
8 (800) 351-16-45

MWK08D-01

二位三通电磁阀
3-Way,2-Posotion

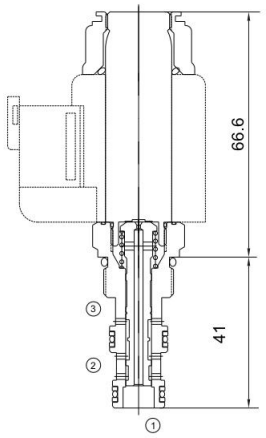

机能符号 Symbol



技术参数 Specifications

· 工作压力 Operating Pressure	350BAR
· 流量 Flow	19L/min
· 内泄漏 Internal Leakage	90ml/min.max.at operating pressure
· 温度 Temperature	-30°C to +120°C(-22°F to+250°F)
· 插孔 Cavity	08-3 see page K-9
· 流体 Fluids	Mineral-based fluids with viscosities of 7.4 to 420 cSt.

产品特性 Features

· 硬化处理, 零件耐久性强
Hardened,precision ground parts for durability
· 工业通用插孔
Industry common cavity
· 高效能的电磁铁结构
Efficient wet-armature construction
· 可持续工作的电磁铁
Continuous-duty solenoid
· 紧凑的结构
Compact size

压力-流量性能曲线
Performance Curve Pressure Drop vs.Flow



工作 Operation

断电时，此阀允许油液从②到③或从③到②都有自由流动，而在①处截止；通电后，阀门允许从端口①到②或从端口②到①流动，同时阻塞端口③的流动。
When de-energized, the valve allows flow from port ② to port ③ or from port ③ to port ② free mobility , while blocking flow at port ①;
When energized, the valve's spool shifts open from port ① to port ② or from port ② to port ① , while blocking flow at port ③.

安装尺寸 INSTALLATION DIMENSIONS

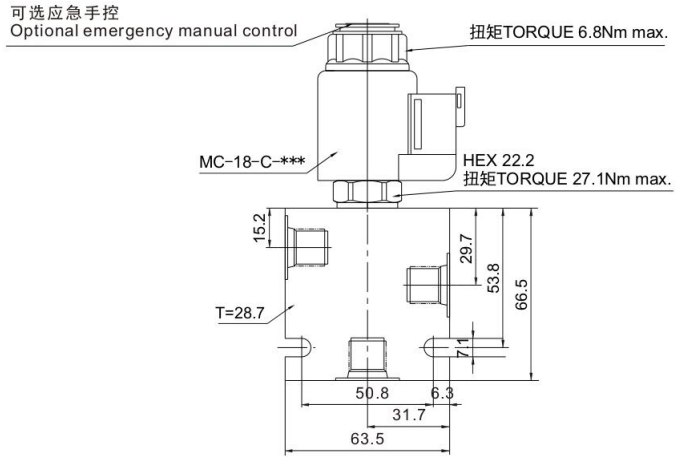

E

订购型号 Order Type

MWK08D-01 – * – * – * * * – * *

I II III IV V VI VII

Ⅰ. 手控应急 Manual Emergency
空白=无手控应急 Not Manual
M=手控应急 Manual Emergency

Ⅱ. 油封 Seal-Kits
N=丁腈橡胶 Buna N
V=氟橡胶 Viton

Ⅲ. 电压 Voltage
12=12V
24=24V

Ⅳ. 线圈连接 Coil Connection
F=德标插头 Din Plug

Ⅴ. 电流类型 Current Type
D=直流电 Direct current

Ⅵ. 阀块材质 BODY MATERIAL
A=6061-T6铝
耐压强度207Bar
6061-T6 aluminum
alloy rated at 207Bar
S=钢材 耐压强度350Bar
steel rated at 350Bar

Ⅶ. 阀块油口 BODY PORTING
4T=SAE 4T
8T=SAE 8T
3G=G3/8
3N=NPT3/8
其他螺纹油口是可选择的
Other porting is available